



LINEAR SERIES

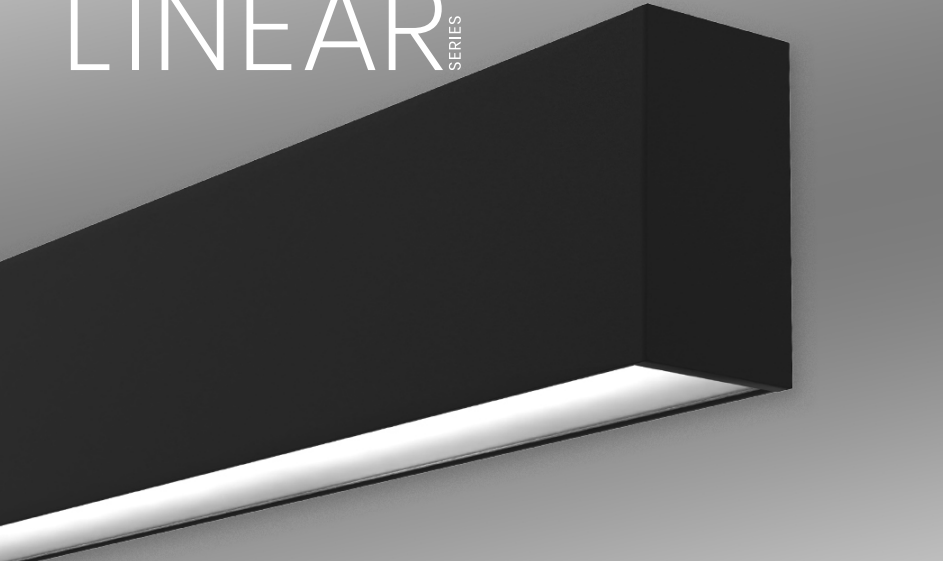

DATE PROJECT

COMMENTS

CERTIFICATIONS



B25 WALL INDIRECT / DIRECT

FEATURES

OPTICAL SYSTEM

- 1. OPTIMAL ASYMMETRIC DISTRIBUTION**
Upper optics consist of an asymmetric distribution designed to throw light into the room providing more evenly illuminated wall and ceiling for visual comfort.
- 2. VERSATILE LIGHT ENGINE**
Multiple lumen intensities provide the correct level of illumination within each space.
- 3. SEAMLESS, HIGH EFFICIENCY LIGHT DIFFUSER**
Seamless, roll-in lens eliminates light leaks, minimizes glare, and provides uniform light distribution.

ADA COMPLIANT HOUSING

- 4. SURE-FIT ALIGNMENT**
Full-body alignment system adjoins each luminaire section to ensure straighter rows while minimizing the appearance of seams.


ELECTRICAL

- 5. EFFICACY**
Luminaire efficacy up to 140.7 lumens per watt helps achieve Best in Class power density performance.


DIMMING

- 6. 0-10 VOLT DIMMING TO 1% STANDARD**

LIGHT DISTRIBUTION



CROSS-SECTION



SAMPLE PART NUMBER: B25-WID-04-MU-MD-30-UNV-WH

ORDERING

SERIES	LENGTH ¹	UPPER OUTPUT ⁴		DIRECT OUTPUT ⁴		CCT	VOLTAGE	FINISH	ORDERING NOTES 1 Nominal length 2 EM not available with 347V 3 EM Not available with 2' fixtures 4 1250 lm/ft and 1000 lm/ft not available with 2' fixture
B25-WID	XX FT	VHU 1250 LM/FT	LU 500 LM/FT	VHD 1250 LM/FT	LD 500 LM/FT	30 3000K	UNV 120-277V	WH White	
	2' Increments EX: 20' FT = 20	HU 1000 LM/FT	VLU 250 LM/FT	HD 1000 LM/FT	VLD 250 LM/FT	35 3500K	347² 347V	BLK Black	
		MU 750 LM/FT	CU Custom	MD 750 LM/FT	CD Custom	40 4000K		S Silver	
								GR CHARCOAL Gray	

OPTIONS

CRI	INTEGRATED CONTROLS	CIRCUITING	FOR INDIVIDUALS	FOR LINEAR RUNS ^{5, 6}
BLANK = 80 CRI OS	Occupancy Sensor	SS-U/D Separate Switching UPLIGHT SWITCHED SEPARATELY FROM DIRECT LIGHT	EM⁵ Emergency Battery	EM EMERGENCY BATTERY PACK
C90 90 CRI	DOS Daylight Occupancy Sensor		EC Emergency Circuit	EC EMERGENCY CIRCUIT
				QUANTITY PER RUN ⁵
				POSITION IN RUN ⁶

EMERGENCY OPTION NOTES

5 EM and EC Quantity is not to exceed number of discrete fixture sections in a row


6 EM and EC position refers to which fixture in the run that will be powered by the EM/EC circuit.

Position Options: S = Starter; J = Joiner; E = Ender
Ex: B25-WID-24-MU-MD-30-UNV-WH-EM2SJ

STARTER	JOINER	ENDER
---------	--------	-------


B25 WALL

INDIRECT / DIRECT



PHOTOMETRICS & ENERGY CHARTS

B25-WID-04-LU-LD-30-UNV
 Total Lumens: 4,000
 Ratio: 50% Up & 50% Down
 Wattage: 31.5
 Efficacy: 127 LM/W
 Fixture Length: Four Feet

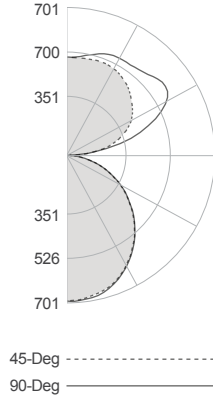

Zonal Lumen Summary

Zone	Lumens	% Fixt
0 - 30	541.3	13.5
0 - 40	883.8	22.1
0 - 60	1555.8	38.9
0 - 90	1999.9	50.0
90 - 120	635.6	15.9
90 - 130	987.7	24.7
90 - 150	1601.3	40.0
90 - 180	2000.0	50.0
0 - 180	3999.9	100.0

SPECIFICATIONS

MECHANICAL

Housing Construction:

Extruded aluminum 6063-T5 alloy outer housing with die-formed steel internal components for strength, alignment, and mounting attachment.

Alignment/Assembly:

The Sure-Fit alignment system employs a full height joining biscuit, designed to create straighter rows and eliminate light leak at fixture seams. Two nuts are used to draw fixtures together to secure housing-to-housing attachment.

Lengths:

The B25 is available in individual 2-foot (25.25"), 4-foot (48"), 6-foot (72"), 8-foot (96"), 10-foot (120"), and 12-foot (144") lengths. Longer fixture rows are available and will be configured per Lumato factory specifications; typical rows are configured with 8-foot fixtures. Our high-quality die-cast end caps are engineered to conceal all fasteners and to retain the sealing gaskets on the inside of the fixture while completing the clean and minimalistic look of this luminaire. Each end cap adds 5/16" to the length of each fixture run.

Mounting Method/Hardware:

Wall mounting hardware uses 2 galvanized sheet metal mounting cleats with side-to-side adjustability for final alignment. Position all junction boxes in accordance with submittal drawings and installation instructions.

Fixture Finish:

The B25 fixture finish is available in White, Black, Sliver or Charcoal Gray polyester powder coat finish to ensure durability. Luminaires are available in any RAL color as an option.

Integrated Controls:

The B25 is available with optional integrated controls. Sensors are conveniently designed to mount in aperture and are located at the power feed end of each fixture. For runs, each fixture section will be supplied with a discrete sensor that will control that specific section.

OPERATION

Light Engine:

The B25 is available in 3000K, 3500K, and 4000K CCT all within a 3-Step MacAdam Ellipse and has a standard CRI of 80+ with a 90+ CRI option available.

Direct Optics:

Our frosted acrylic roll in lens is designed to maximize efficiency while minimizing glare and eliminating light leaks at fixture joints. Individual fixtures come with lens factory installed while continuous runs will have a separate lens kit installed in the field once the run is hung. This will allow for a continuous/seamless lens up to 100 ft.

Upper Optics:

The upper optics consist of an extruded acrylic lens that provides an asymmetric distribution designed to throw light into the room. This produces a more evenly illuminated wall and ceiling for visual comfort.

Electrical:

Class 2 programmable (factory pre-set) premium power supply, 120-277VAC input or 347V. Power factor >0.9 THD<15%. Integral Surge Protection to 2KV.

Dimming:

The B25 comes standard with 0-10V dimming to 1%.

Emergency Battery Pack:

Emergency Battery Pack has been engineered to exceed UL minimum safety standards. For most fixtures, the entire direct portion of the fixture will be illuminated by the EM Battery Pack. For 8' VHD, only the first portion of the fixture will be illuminated by the EM battery pack. "Quantity per Run" refers to the number of fixtures in the run that will be supplied with an emergency battery pack. "Position in Run" refers to which fixture in the run that will contain the battery. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run needing two emergency battery packs, one in the starter and one in the joiner, would be ordered as EM2SJ. When a joiner is selected, battery packs are always supplied in 8' fixtures before 6' fixtures in that run.

Emergency Circuit:

Emergency Circuit fixtures are engineered so that the entire fixture is wired to the emergency circuit. "Quantity per Run" refers to the number of fixtures in the run that are wired to the emergency circuit. "Position in Run" refers to which fixture in the run that will be powered by the Emergency Circuit. Position options are Starter (S), Joiner (J), or Ender (E). For example, a 24' run with needing two emergency sections, one in the starter and one in the joiner, would be ordered as EC2SJ. When a joiner is selected, Emergency Circuits are always supplied in 8' fixtures before 6' fixtures in that run.

GENERAL

Warranty:

Ten (10) year limited warranty from date of shipment, covers LED's, driver and luminaire. Optional accessories are covered by their individual Manufacturers' warranties.

Lumen Maintenance:

Rated for 85% initial lumen output (L85) at 50,000 hours of operation, operated at 25°C ambient temperatures; per TM-21 Guidelines published by the Illuminated Engineering Society (IES).

Certification:


All luminaires are UL/cUL Listed to UL 1598 Standards and approved for Indoor use in Dry/Damp Locations.

Manufactured in the USA:


All Lumato luminaires and components (with the exception of our LED boards and drivers) are proudly manufactured and assembled in the USA. All luminaires are UL/cUL Listed to UL 1598 Standards and approved for Indoor use in Dry/Damp Locations.

B25 WALL


INDIRECT / DIRECT



FIXTURE ROW LAYOUT: SINGLE UNIT 2' - 4' - 6' - 8' - 10' - 12'

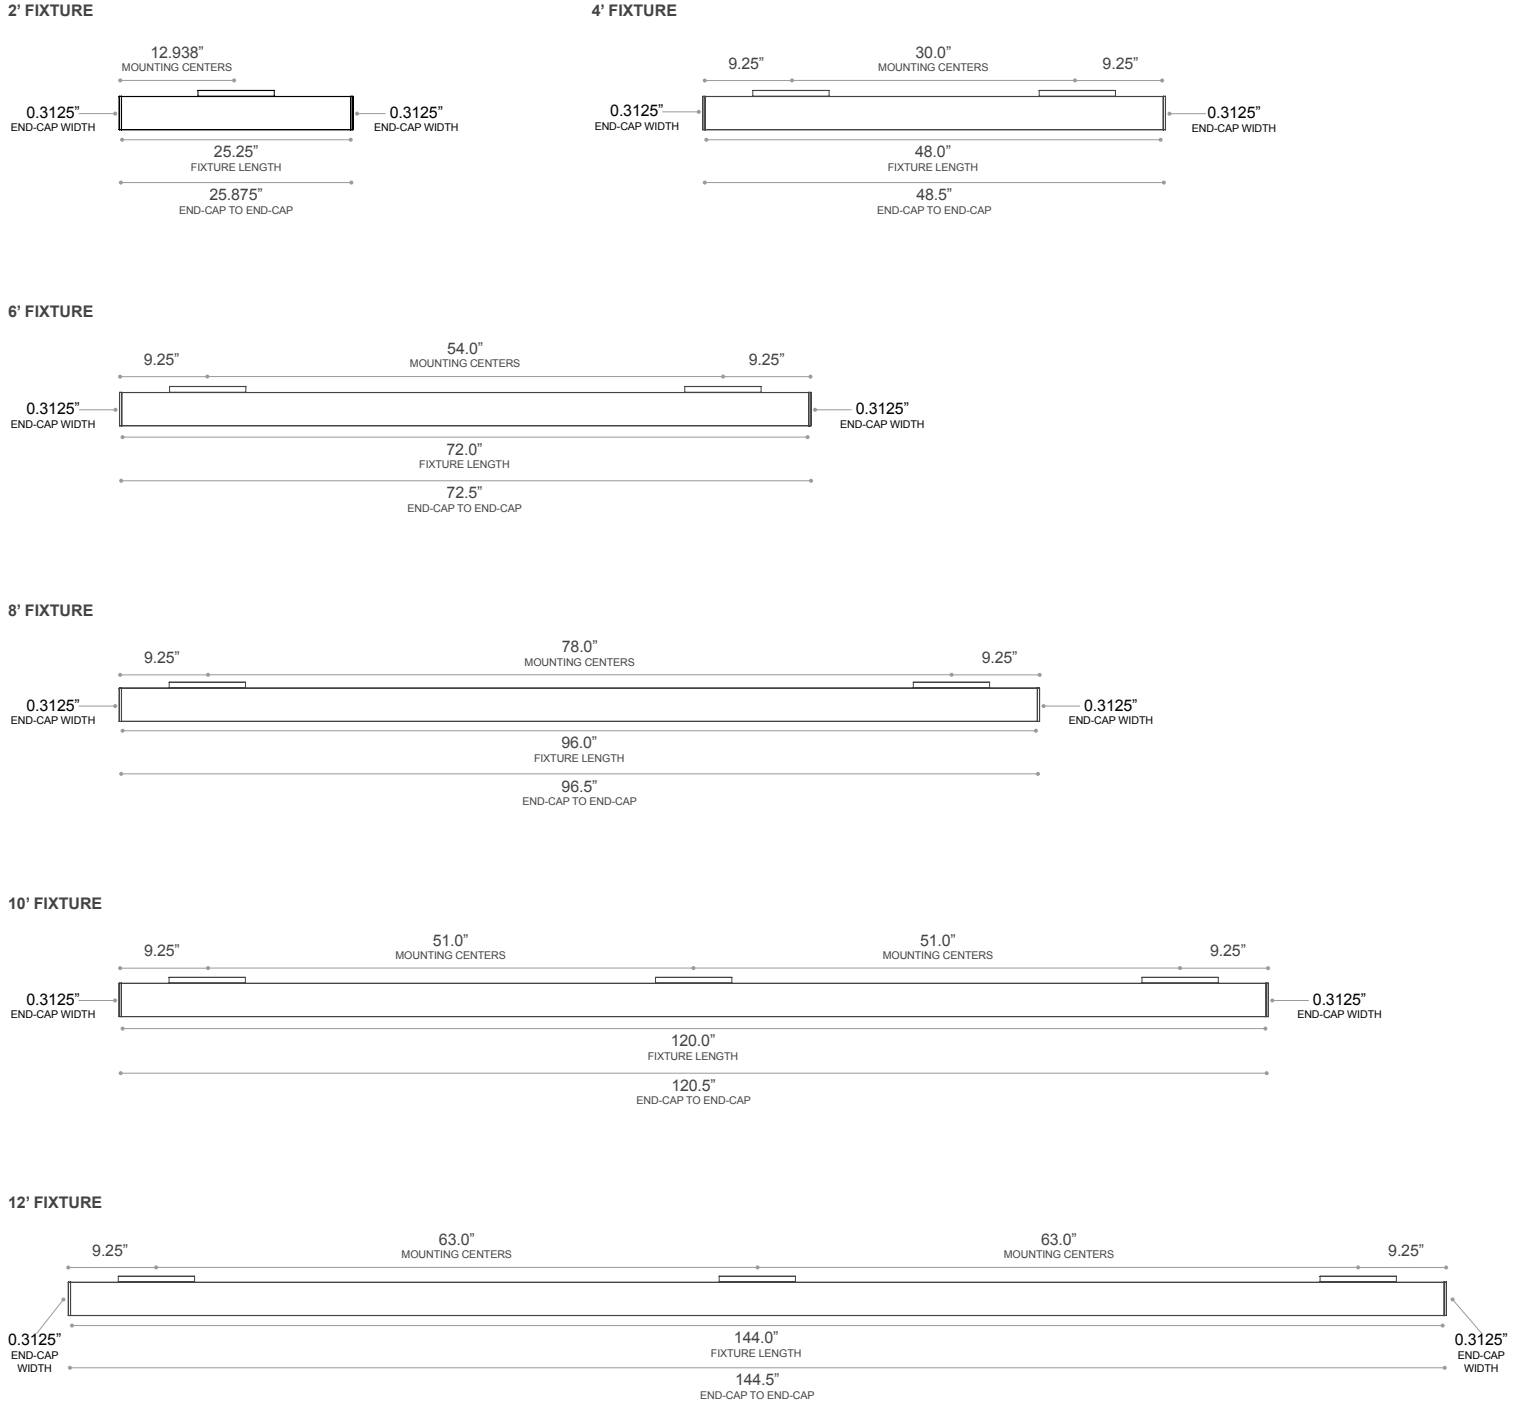


B25 WALL
INDIRECT / DIRECT



FIXTURE ROW COMPONENTS

RUN LENGTH (FT)	FIXTURE LENGTHS									JOINER KITS
	STARTER	JOINER							ENDER	
	1	2	3	4	5	6	7	8	9	
14	6'	-	-	-	-	-	-	-	8'	1
16	8'	-	-	-	-	-	-	-	8'	1
18	4'	6'	-	-	-	-	-	-	8'	2
20	4'	8'	-	-	-	-	-	-	8'	2
22	6'	8'	-	-	-	-	-	-	8'	2
24	8'	8'	-	-	-	-	-	-	8'	2
26	4'	6'	8'	-	-	-	-	-	8'	3
28	4'	8'	8'	-	-	-	-	-	8'	3
30	6'	8'	8'	-	-	-	-	-	8'	3
32	8'	8'	8'	-	-	-	-	-	8'	3
34	4'	6'	8'	8'	-	-	-	-	8'	4
36	4'	8'	8'	8'	-	-	-	-	8'	4
38	6'	8'	8'	8'	-	-	-	-	8'	4
40	8'	8'	8'	8'	-	-	-	-	8'	4
42	4'	6'	8'	8'	8'	-	-	-	8'	5
44	4'	8'	8'	8'	8'	-	-	-	8'	5
46	6'	8'	8'	8'	8'	-	-	-	8'	5
48	8'	8'	8'	8'	8'	-	-	-	8'	5
50	4'	6'	8'	8'	8'	8'	-	-	8'	6
52	4'	8'	8'	8'	8'	8'	-	-	8'	6
54	6'	8'	8'	8'	8'	8'	-	-	8'	6
56	8'	8'	8'	8'	8'	8'	-	-	8'	6
58	4'	6'	8'	8'	8'	8'	8'	-	8'	7
60	4'	8'	8'	8'	8'	8'	8'	-	8'	7
62	6'	8'	8'	8'	8'	8'	8'	-	8'	7
64	8'	8'	8'	8'	8'	8'	8'	-	8'	7
66	4'	6'	8'	8'	8'	8'	8'	8'	8'	8
68	4'	8'	8'	8'	8'	8'	8'	8'	8'	8
70	6'	8'	8'	8'	8'	8'	8'	8'	8'	8
72	8'	8'	8'	8'	8'	8'	8'	8'	8'	8

	FIXTURE LENGTH	CENTER-TO-CENTER BRACKET SPACING
4'	48.0"	30.0"
6'	72.0"	54.0"
8'	96.0"	78.0"

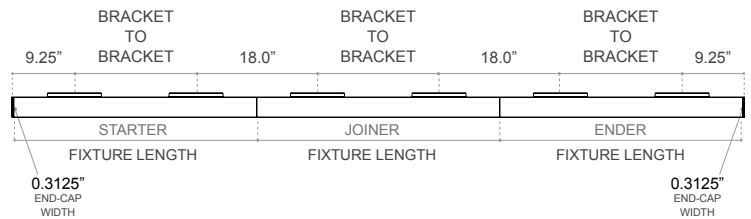

NOTE 1
2' fixtures use a single mounting bracket centered on the fixture

NOTE 2
10' & 12' fixtures have a third mounting bracket centered on the fixture